

P/N:

A29M29F00

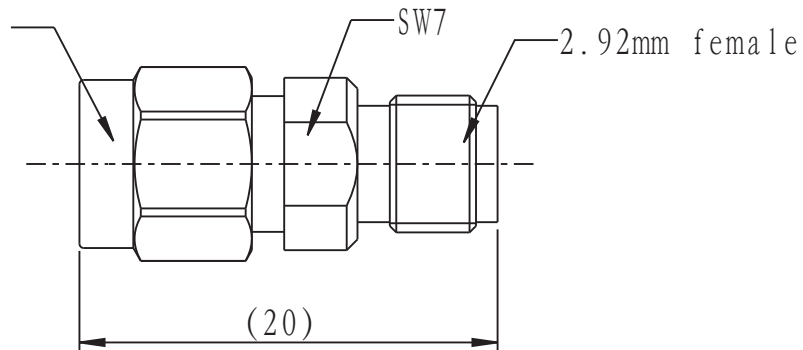


Description:

2.92mm male to 2.92mm female



2.92mm male

*Electrical Data**Materials**Enviromental Data*

Impedance :50 ohm

Housing: Stainless steel;  
passivated

Temp:-55 - +135

Frequency:DC-40GHz

Center Contact:Brass;  
Gold PlatedVibration:MIL-STD  
202 214A

VSWR:1.20Max 40GHz

Center Capture: PTFE

Thermal shaock:MIL-STD  
202 107GIL:0.06sq $\sqrt{f_{\text{GHz}}}$ Nut:Stainless steel;  
passivated2011/65/EU (RoHS):  
compliant

proprietary information: the information with this data sheet is  
proprietary and shall not be used for disclosed without prior written  
permission from CAC Technology .

Date:

2015.3.1

[www.cac-mall.com](http://www.cac-mall.com)

Drawn:

Rudy Sun

Check:

Donglv Wang

Appr:

Rugang Hu

Tel: 0086-551-63718423

Fax: 0086-551-63718413

Email: sales@cactechnology.com

Website: www.cactechnology.com