




Adapter
7mm to N female

CACTechnology

A70NNAF0N

DATA SHEET

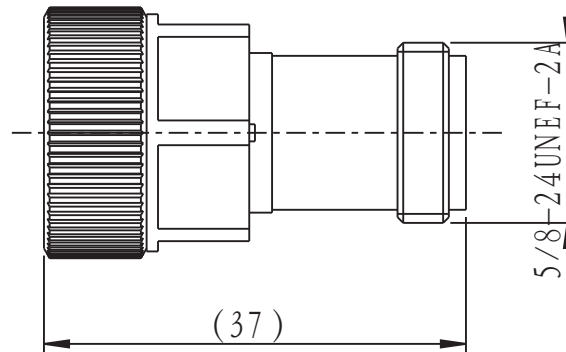

<i>Electrical Data</i>	<i>Materials</i>	<i>Enviromental Data</i>	<i>Mechanical Data</i>
Impedance :50 ohm	Housing: Brass; Ni Plated 7u	Salt Spray Test:48h	Mating Cycles:2000
Frequency:DC-18GHz	Contact female:BeCu; Gold Plated 1.27u	Vibration:MIL-STD 202 214A	Coupling Proof Torque: 1.69N.m
VSWR:1.15Max 18GHz	Contact male:Brass; Gold Plated 1.27u	Thermal shaoock:MIL-STD 202 107G	Coupling Nut Retention: 445N min
IL:0.06sq(f_GHz)	Center Capture: PTFE	Weight:51g	Center Contact Captivation: 66.7N min
Dielectric Withstanding Voltage:2000V	Nut:Brass; Ni Plated 7u	Temp:-55 - +125	Force to Engagement:0.68N.m
Insulation Resistance: 5000Mohm	Clasp:---	2011/65/EU (RoHS): compliant	Force to Disengagement:N/A

proprietary information: the information with this data sheet is
proprietary and shall not be used for disclosed without prior written
permission from CAC Technology .

		<i>www.cactechnology.com</i> Tel: 0086-551-63718423 Fax: 0086-551-63718413 Email: sales@cactechnology.com Add: Chuangzhi Square, No. 429, Maanshan South Rd. Hefei, Anhui, China (230051)
Date:	2012.10.29	
Drawn:	Yuan Jin	
Check:	Zhen Wang	
Appr:	Rugang Hu	