



2.92mm connector
for $\varnothing 0.38$ seal pin



CAC Technology

C29FS15F1

DATA SHEET



1:1

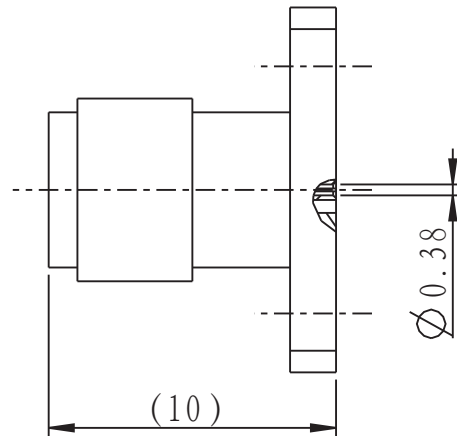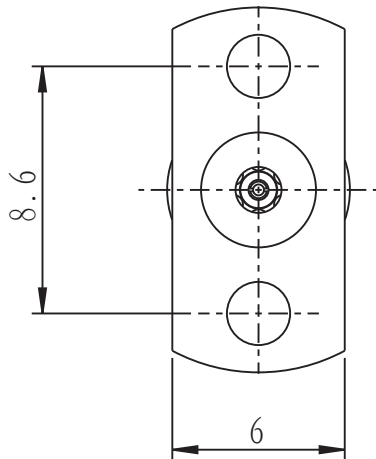

<i>Electrical Data</i>	<i>Materials</i>	<i>Enviromental Data</i>	<i>Mechanical Data</i>
Impedance :50 ohm	Housing: Stainless Steel; Passivating	Salt Spray Test:48h	Mating Cycles:2000
Frequency:DC-40GHz	Contact female:BeCu; Gold Plated 1.27u	Vibration:MIL-STD 202 214A	Coupling Proof Torque: 1.17N.m
VSWR:1.15Max 40GHz	Contact male:Brass; Gold Plated 1.27u	Thermal shaoock:MIL-STD 202 107G	Coupling Nut Retention: 269N min
IL:0.06sq $t(f_GHz)$	Center Capture: PTFE	Weight:18g	Center Contact Captivation: 22N min
Dielectric Withstanding Voltage:1000V	Nut:Brass; Gold Plated 1.27u	Temp:-55 - +125	Force to Engagement:0.23N.m
Insulation Resistance: 5000Mohm	Clasp:QSn6.5-0.1 (Bronze)	2011/65/EU (RoHS): compliant	Force to Disengagement:N/A

proprietary information: the information with this data sheet is
proprietary and shall not be used for disclosed without prior written
permission from CAC Technology .

Date:	2012.10.29	www.cactechnology.com Tel: 0086-551-63718423 Fax: 0086-551-63718413 Email: sales@cactechnology.com Add: Chuangzhi Square, No. 429, Maanshan South Rd. Hefei, Anhui, China (230051)
Drawn:	Yuan Jin	
Check:	Zhen Wang	
Appr:	Rugang Hu	